
National

Operational Excellence Standard (OES) — Methods of Procedure (MoPr) for outside-only special request order (SRO) — Residential

HOW23051 | MODIFIED 11/28/2025

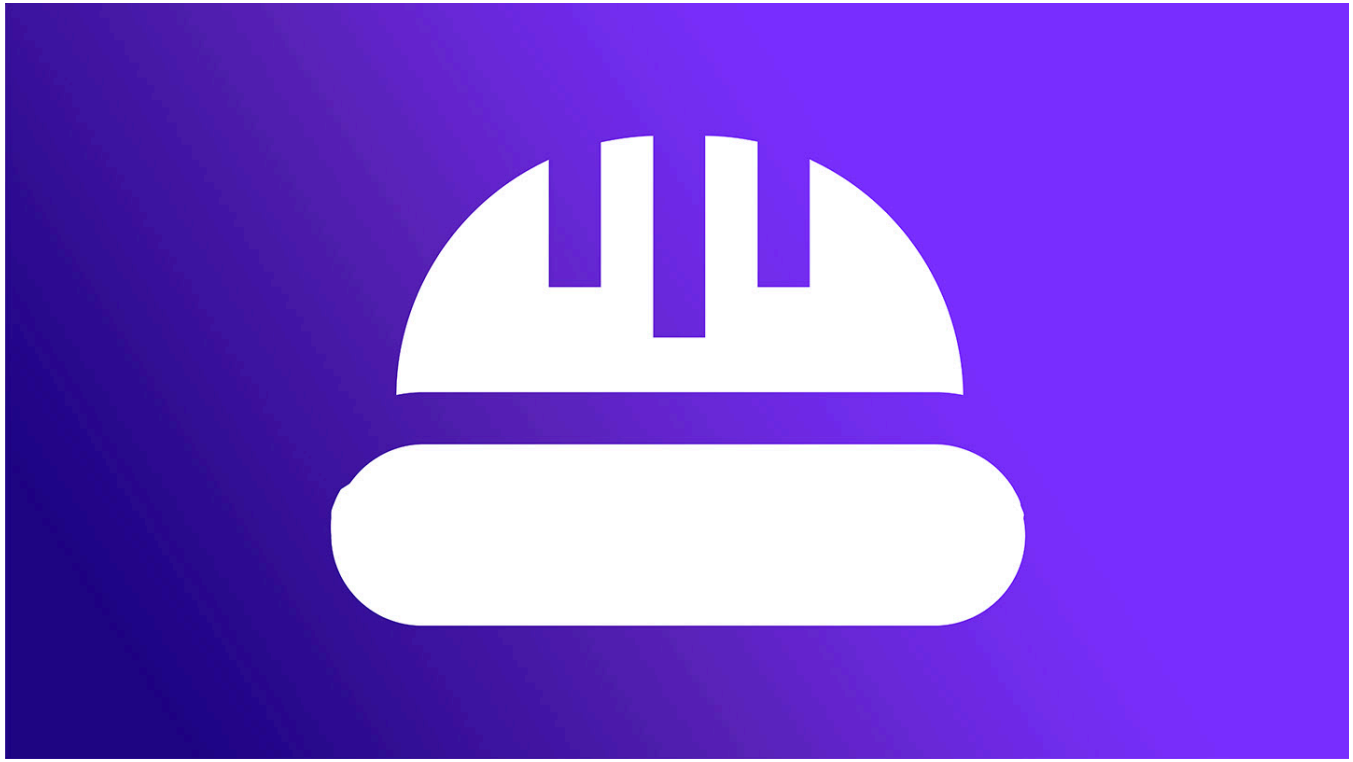

Summary

This document outlines the processes and requirements for outside-only appointments where all work to be completed at the customer's premises is outside of the home and does not require customer interaction. These jobs may or may not be scheduled with the customer.

Quick Links

- What's changed in this article
- Overview
  - General overview of outside-only SRO
- Outside only — Single-family dwelling
  - Prepare for your outside-only SRO job
  - Outside drop system validation for outside-only SRO
- Appendix
- Document owner, contributors, and approvers

What's changed in this article

Date	Summary of change
November 14, 2025	Added to Celestial.

Date	Summary of change
September 17, 2024	Updated for yearly review, including a complete rework of document to reflect current outside only work.
February 1, 2020	Released document.

Overview

This article covers the MoPr for outside-only SRO — Residential OES.

General overview of outside-only SRO

In an effort provide a consistent and systematic approach to all customer visits, this national document has been created to define all protocols and expectations for every outside-only SRO customer visits. This document is not designed to be inclusive of all tasks and/or situations that will occur. In these situations, consult with your local management team on how to proceed.

- If you encounter any situation or interaction where you feel unsafe, immediately remove yourself and contact your supervisor.
- All current Comcast safety processes and procedures are to be followed throughout this process whether specifically referenced or not.
- Existing OES materials will govern the installation and use of customers' drop network and CPE.
- Only products approved by Comcast Corporate Engineering shall be used in the radio frequency (RF) and optical drop system.
- All devices must adhere to the approved cable and hardware specification standard.

- All optical passive devices must meet Comcast Next Generation Access Networks (NGAN) or Xfinity Network (XNET) Corporate Engineering guidelines.
- **Deviations:** Steps outlined in this document are the Comcast standard and may not be modified in their implementation. Any deviations from the procedures prescribed in this document shall be approved by Comcast Corporate Technical Operations.
- **Workmanship:** All work performed will be of the highest possible workmanship. All work will adhere to Comcast's standards, local, state, and federal codes and/or requirements and be fully compliant to any stipulations made by the landlord and/or agent in control of the property.
- **Work area:** The work area defined as any area where you are completing your work, will be always kept clean and orderly. The work area shall be cleaned of trash, litter, and debris.

Comcast proprietary and confidential

Information in this document is subject to change without notice. This document may contain sensitive confidential proprietary information and trade secret information concerning Comcast. All recipients have an obligation not to disclose to any non-Comcast person or entity the information contained herein. Partial or full disclosure, even inadvertent disclosure, of this information may cause irreparable damage to Comcast. No part of this document may be reproduced in whole or in part, or stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, for any purpose, without the express written permission of Comcast. If you are not the intended recipient of this document, you are hereby notified that any dissemination, distribution or copying of this document or its contents is strictly prohibited.

Comcast may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. The furnishing of this document does not grant any license to these patents, trademarks, copyrights, or other intellectual property.

Outside only — Single-family dwelling

Prepare for your outside-only SRO job

- **Pre-job preparation:**
  - Review premise health test (PHT) results if available.
  - Review job notes and expectations.
  - Other key elements as defined in ULearn training and OES.
- **Arrival:**
  - Circle of safety.
  - Check appearance.
  - Jobsite survey.
- **Customer awareness:**
  - Review job details.
    - Attempt to contact the customer.
      - If you cannot contact the customer, complete work then attempt again at job wrap-up.
  - Set clear expectations.
    - Inform the customer that all work to complete their appointment will be performed outside their home. Let them know if a service interruption is possible.

Outside drop system validation for outside-only SRO

- **Bondblock/service distribution point**
  - All work is to begin at the bondblock/service distribution point.
  - Follow all current Comcast safety procedures while completing all work at the location.
  - Perform a visual Inspection of the bonding location and use your foreign voltage detector (FVD) to ensure there is no voltage present.

    - If voltage is present, follow the foreign voltage safety procedures.
  - Utilize your amp clamp to ensure that any current present is below threshold.
    - If current is above 1 amp, follow current on coax procedure.
  - Bonding validation:
    - Validate bonding meets the requirements as defined in OES bonding and grounding standard. (Bondblock, ground wire, and electrical connection.)
    - Perform ohm test to ensure bonding is less than 25 ohms.
    - Utilize bonding validation tool (BVT) application to validate bonding.
  - Ensure that the location meets all other OES requirements.
    - House box, point of entry (POE), connectors, components and drop routing, and/or cable management.
    - POE must be present or installed as defined in the OES Multimedia Over Coaxial Alliance (MoCA) Standard.
  - Verify that the drop is active. If yes, proceed to signal testing below. If not, proceed with terminating the drop.
    - Signal testing: All signal testing is performed using the XM Meter platform, and all results are to be saved to the cloud.
      - Down Stream (DS) spectrum test: All forward levels must be verified using the XM Meter DS spectrum test and must be within the thresholds as defined by OES RF signal configuration.
      - Data over cable service interface specifications (DOCSIS) test: DOCSIS registration test must be completed to verify that US and DS levels are within the thresholds as defined by OES RF signal configuration.
    - Complete any other testing as required by Division Technical Operations.
  - Terminate the drop.
  - Move to the tap location.
- **Tap**

- Follow all current Comcast safety procedures while completing all work at the Tap location.
    - Use your FVD to ensure there is no voltage present.
        - If voltage is present, follow the foreign voltage safety procedures.
- Visual inspection at the tap:
    - Ensure that all cables, connectors, fasteners, drop components, and materials follow all requirements that are defined in Comcast's OES and are approved by Comcast Engineering.
- **Signal level testing:** All signal testing is performed using the XM Meter platform, and all results are to be saved to the cloud.
    - **DS spectrum test:** All forward levels must be verified using the XM Meter DS spectrum test and must be within the thresholds as defined by OES RF signal configuration.
    - **DOCSIS test:** DOCSIS registration test must be completed to verify that US and DS levels are within the thresholds as defined by OES RF signal configuration.
    - **Ingress test:** Using your XM Meter perform the ingress scan on the drop and results must meet the XM Ingress compliance parameters.
        - Any spike over -30db must be corrected.
    - Complete any other testing as required by SRO type (i.e., leakage or division technical operations).
- Certify, repair, replace, RTM.
    - Based on your results from above (visual inspection at the tap through signal level testing), either:
        - Certify that the drop is within specification,
        - Replace the drop as it does not meet the minimum specifications, **or**
        - Submit an RTM as the levels coming from the tap are not within specification.

    - RTM Submission must follow all the requirements and processes as defined by OES Fulfillment RTM.
    - Continue your certification and return to the Bondblock/service distribution point.
- **Bondblock:**
    - Complete signal testing as required in signal testing.
    - Ingress test: Using your XM Meter, perform the ingress scan on the home drop system and must meet the XM ingress compliance parameters.
        - Any spike over -30 db must be corrected or mitigated.
        - If ingress cannot be corrected from outside of the home, contact your supervisor and follow division and regional engineering processes.

- **Home network distribution — Exterior:**
    - Visual inspection:
        - Perform a visual inspection of all the cables on the outside of the home that are active.
        - Validate, repair, replace.
            - Ensure that all cable routing, fasteners, and materials follow all requirements that are defined in Comcast's OES and are approved by Comcast Engineering.

- **Wrap up:**
    - Verify that the reason for the SRO has been resolved, i.e., water waves resolved, leakage repaired, etc.
    - Verify services have been restored utilizing PHT to ensure all equipment is reporting and in specs.
    - Customer awareness:
        - Attempt to contact the customer again.
        - If contacted verify that services have been restored and apologize for any inconvenience and thank them for their business.

- **Complete the job:**
    - Verify that all tools and equipment have been returned to your vehicle.

- Ensure that all follow-up has been complete i.e., one drop, RTM, etc.
- Utilize appropriate coding and closing of the job.
- Complete circle of safety and prepare for your next job.

Appendix

CDE_TBL_VAL_C32	JOB_TYP_DESCR_C32	In or out
2Z	BC RPL AER DRP	Outside
3G	RESI GROUND REPAIR	Outside
3I	BC GROUND RPR	Outside
4M	REMOVE DRP CUT OVR	Outside
7G	GO128	Outside
7L	PRP INITIAL PASS	Outside
C0	MDU/BLK CLEANUP	Outside
C9	CONCRETE CUT	Outside
DQ	REPLACE DROP FIBER	Outside
IA	CABLE LOCATES	Outside
IT	BLOW CONDUIT	Outside

CDE_TBL_VAL_C32	JOB_TYP_DESCR_C32	In or out
IW	LEAKAGE	Outside
IZ	OUTSDE DROP-AERIAL	Outside
JS	OUTSDE DROP-UNDERG	Outside
KA	PED REPAIR/REPLACE	Outside
KV	MARKET HEALTH	Outside
KX	STORM RELATED DROP	Outside
LA	PRIORITY LEAKAGE	Outside
LC	LEAKAGE RPT	Outside
LL	NOT HOME INSTALL	Outside
LN	GO 95 - PUBLIC	Outside
LO	GO 95-FULFILLMENT	Outside
LS	GO 95 - NETWORK	Outside
LU	GO 95 - UTILITY	Outside
PD	PROACTIVE DRP HLTH	Outside
PF	PROACT XIT OUTSIDE	Outside
RA	EPON LONG DROP AER	Outside

CDE_TBL_VAL_C32	JOB_TYP_DESCR_C32	In or out
RB	EPON LONG DROP UG	Outside
YW	FIBER SRO	Outside
YY	FIBER DROP BURY	Outside
Z2	EPNDRPBRY 0-600 FT	Outside

Document owner, contributors, and approvers

Document owner:

- James Kolcun, Technical Operations, HQ

Contributors:

- Scott Melanson, Technical Operations, Northeast Division
- Mike Darnell, Technical Operations, Central Division
- James Mascarenas, Technical Operations, West Division

Approvals:

- Meena Soleiman, SVP Tech Ops & Eng, Northeastern Division
- Rachel Solomon, SVP Tech Ops & Eng, Western Division
- Tony Speller, SVP Tech Ops & Eng, Central Division
- Stephen Zanetich, VP Technical Operations, HQ
- Patrick McDonald, VP2 Technical Operations, HQ
- Michael Hewitt, SVP Technical Operations, HQ

↑ Back To Top