
National

Operational Excellence Standard (OES) — Service distribution point and enclosure

HOW22908 | MODIFIED 10/23/2026

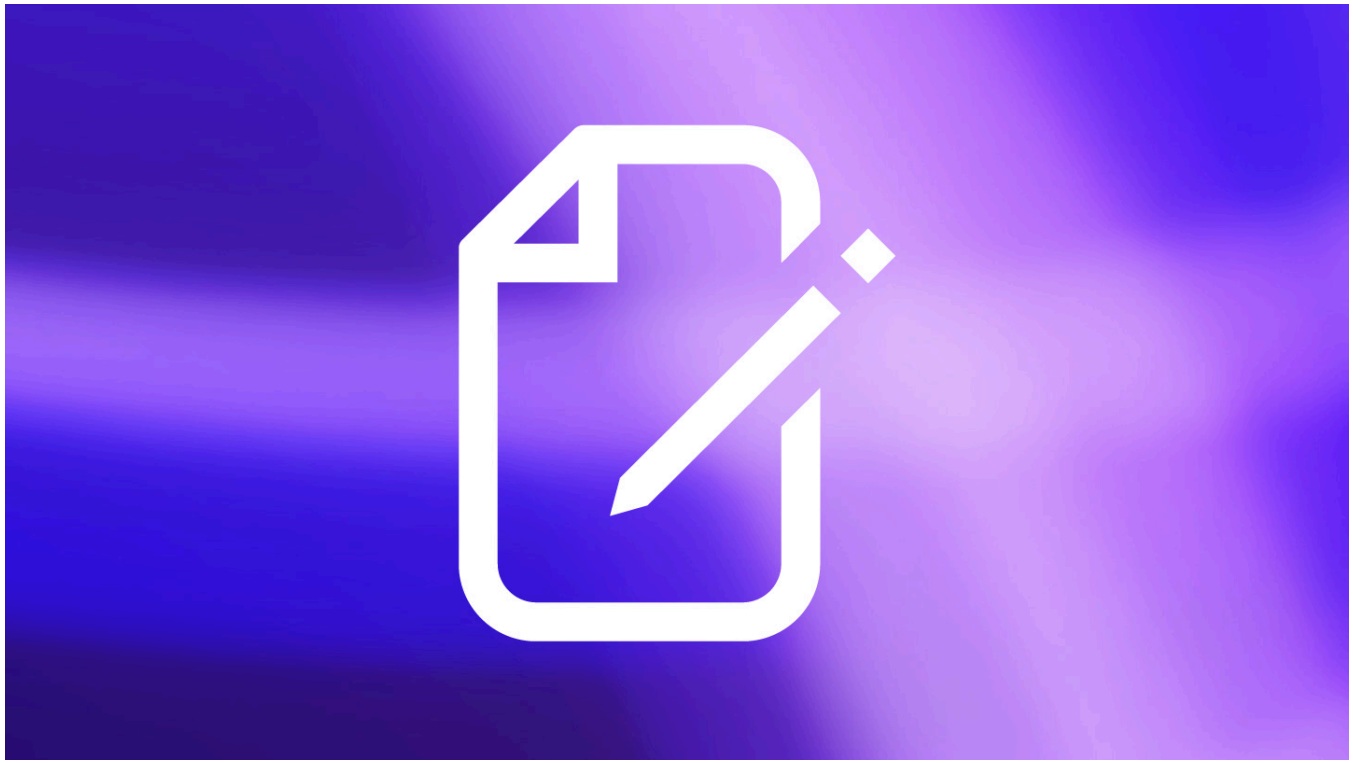

Summary

This standard covers the correct installation requirements for all cable and hardware

at the point where the services are distributed to the premise.

Quick Links

- At a glance
- Guidelines
- Coaxial cable with an enclosure
- RFOG with an enclosure
- EPON with an enclosure
- Existing coaxial cable without an enclosure
- OES document owner, contributors, and approvers
- What's changed in this article

At a glance

This OES covers all requirements for the service distribution point and the proper installation of cables and hardware. Within this section, the terms "cable," "cables," or "drop" may refer to either a **coaxial** or a **fiber drop**. When required, the use of each term will be defined based on the specification.

Comcast proprietary and confidential

Information in this document is subject to change without notice. This document may contain sensitive confidential proprietary information and trade secret information concerning Comcast. All recipients have an obligation not to disclose to any non-Comcast person or entity the information contained herein. Partial or full disclosure, even inadvertent disclosure, of this information may cause irreparable damage to Comcast. No part of this document may be reproduced in whole or in part, or stored in a retrieval system, or transmitted in any form or by any means, electronic,

mechanical, photocopying, recording, or otherwise, for any purpose, without the express written permission of Comcast. If you are not the intended recipient of this document, you are hereby notified that any dissemination, distribution or copying of this document or its contents is strictly prohibited.
Comcast may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. The furnishing of this document does not grant any license to these patents, trademarks, copyrights, or other intellectual property.

Guidelines

This document does not substitute for any local, state, or federal code or requirements, but should be used as a supplement to these.


- **Deviations:** Practices and configurations outlined in this document are the Comcast standard and may not be modified in their implementation. Any deviations from the standards prescribed in this document shall be approved by Comcast Corporate Technical Operations.
- **Safety:** All personnel are required to always comply with Comcast's security and safety regulations.
- **Workmanship:** All work performed will be of the highest possible workmanship. All work will adhere to Comcast's Standards, local, state, and federal codes and requirements and be fully compliant to any stipulations made by the landlord or agent in control of the property.
- The service distribution point, typically outside the premise, establishes the boundary between the outside network drop cable and the internal premise distribution wiring.
- It is the point where the drop is bonded to the structure's primary power bonding system before any customer equipment is connected.
- It must be located within 20 ft of and with access to the power grounding electrode.
    - If the ideal installation location does not meet these requirements, contact your supervisors for alternate location approval.

- The service distribution point must be installed in a location that is easily accessible by technicians.
- When connecting drops at the service distribution point, all OES and guidelines must be followed.
- The service distribution enclosure must be attached securely to a wall outside the house using the appropriate materials for the housing type, from a minimum of four feet above the ground, not to exceed five feet, and a minimum of one foot from the utility meter and breaker box.
- For mobile home installations, the service distribution enclosure must be mounted to the service pole or a separate post. It shall never be attached to a mobile type dwelling.
    - If a service pole is not available install the service distribution enclosure as defined by Divisional Engineering.
- All cables and wires must enter the service distribution enclosure from the bottom of the enclosure.
    - Cables must not run through the lid or door of the enclosure.
- The enclosure door must be properly secured closed.

Coaxial cable with an enclosure

- All new installations must have a service distribution enclosure installed on the side of the premise that will contain at a minimum the bond block plus any service- specific filters.
- The service distribution enclosure may also contain splitter or distribution hardware if the only installation option is to feed more than a single outlet from outside of the premise.
    - All devices must be secured and attached inside the service distribution enclosure.

- When cutting input and output cables for placement at the service distribution point, enough cable must be left without exceeding a 270-degree service loop. Also, to maintain minimum bending radius for the drop cable and the bonding wire.

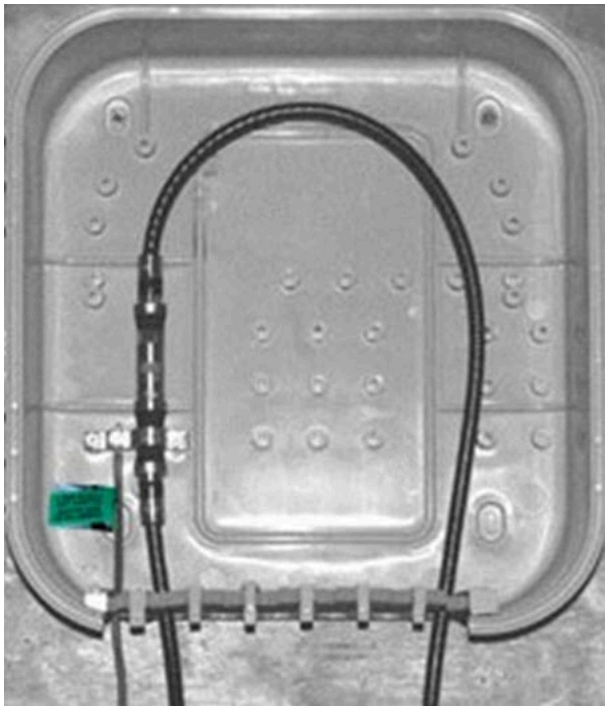




RFOG with an enclosure

- All new installations must have a service distribution enclosure installed on the side of the premise that will contain at a minimum the bonding point within the enclosure.
- The service distribution enclosure will support an NID/NIU, bondblock, MoCA filter and any RF distribution hardware needed (i.e., splitters).
- All excess fiber must be secured and within the enclosure.
- Excess fiber will not be stored at the pole or at the tap in aerial installations.
- Excess fiber will be stored at the underground ped/vault location in underground installations where designed.

EPON with an enclosure


- All new installations must have a service distribution enclosure installed on the side of the premise.
- The service distribution enclosure will support an optical bulkhead.
- Connections will be SC/UPC and used as a demarcation point between Comcast Fiber Network and the premise or building.
- Excess fiber will not be stored at the pole or at the pedestal or vault all excess fiber must be stored at the premise enclosure location.

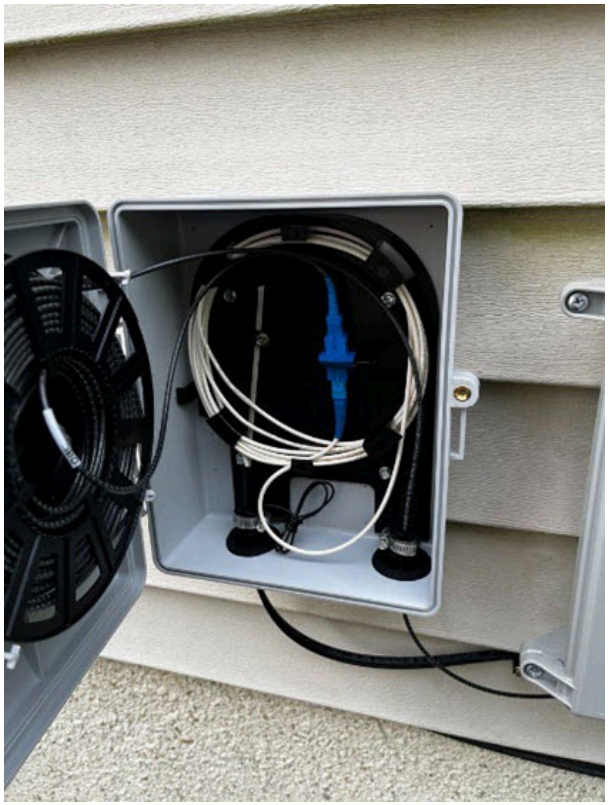


Existing coaxial cable without an enclosure

- Must be upgraded to an enclosure when:
  - Performing a connect/ reconnect.
  - There are splitters or amplifiers at the service distribution location.
  - Drop is being replaced.
- When updating to an enclosure, all OES guidelines must be followed.
  - All prior holes no longer used shall be sealed with RTV or silicone.
- When there is no enclosure, the drop cable must be routed and attached to maintain the minimum bend radius of the cable at all times.

- For all coaxial installations without a service distribution enclosure, minimum five-inch diameter loops of series-6 cable, or minimum eight-inch diameter loops of series-11 cable, each loop not exceeding 270 degrees, must be formed in the cable path before attaching the cable to the premise wall at the bondblock location.

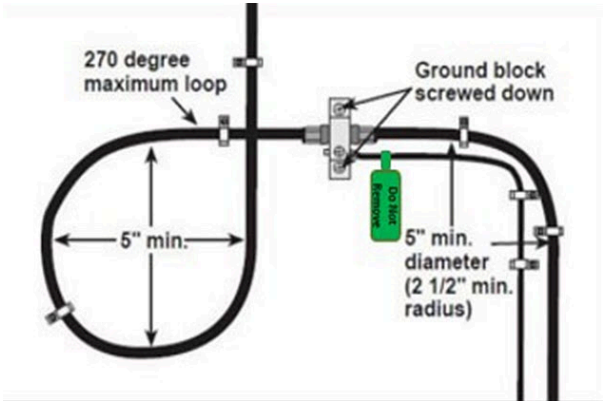

- Never place full 360-degree loops anywhere along the routing of the drop cable.

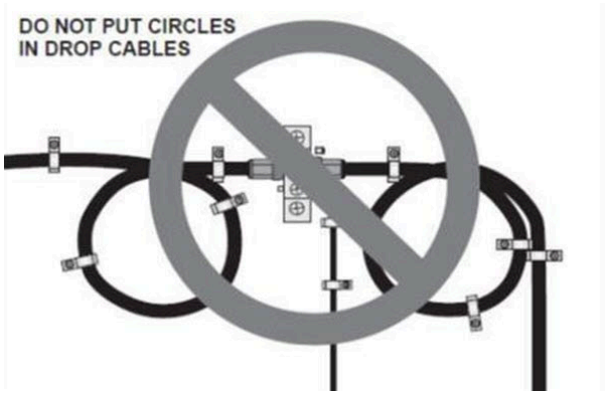

OES document owner, contributors, and approvers

Document owner:

- James Kolcun, Technical Operations, HQ

Contributors:

- Scott Melanson, Technical Operations, Northeast Division
- Mike Darnell, Technical Operations, Central Division
- James Mascarenas, Technical Operations, West Division

Approvals:

- Meena Soleiman, SVP Tech Ops & Eng: Northeastern Division
- Rachel Solomon, SVP Tech Ops & Eng: Western Division
- Tony Speller, SVP Tech Ops & Eng: Central Division
- Stephen Zanetich, VP Technical Operations: HQ
- Patrick McDonald, VP2 Technical Operations: HQ
- Michael Hewitt, SVP Technical Operations: HQ

What's changed in this article

Date	Summary of change
October 23, 2026	Adjusted photos for accuracy.
September 10, 2025	Added to Celestial.
May 2, 2024	Conducted schedule review and updated.
March 8, 2022	Conducted schedule review and updated.
August 26, 2020	Made minor updates for the inclusion of commercial service delivery.

↑ Back To Top